



FIRE HOSE COUPLING & ADAPTOR DSP/GUILLEMIN TYPE



DSP HOSE COUPLING, RIBBED/SERRATED (Material: Aluminium)

	Size	H(mm)	W(mm)	D(mm)	Head	Tail(mm)
	DN40	114	76	55	DSP40	38(Ribbed)
	DN40	155	76	55	DSP40	45(Ribbed)
	DN40	155	76	55	DSP40	45(Serrated)
	DN40	172	109	84	DSP65	70(Ribbed)
	DN40	172	109	84	DSP65	70(Serrated)
	DN40	170	149	123	AR100	110(Ribbed)
	DN40	170	149	123	AR100	110(Serrated)


DSP HOSE COUPLING (Material: Brass)

	Size	H(mm)	W(mm)	D(mm)	Head	Tail(mm)
	BP25	118	52	19	GFR20	25
	HP40	118	57	25	GFR20	25

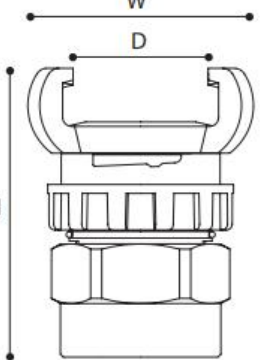
DSP/GUILLEMIN BLNK CAP WITH LOCK RING (Material: Aluminium)



	Size	H(mm)	W(mm)	L(mm)	Head
	DN40	51	54	300	Guillemin
	DN40	51	83	300	Guillemin
	DN40	54	62	380	DSP40
	DN65	58	91	380	DSP65
	DN100	68	121	350	AR100

DSP ADAPTOR WITHOUT LOCK RING (Material: Aluminium)

	Size	H(mm)	W(mm)	D(mm)	Head	Thread
	DN40	57	76	55	DSP40	G1.5"(Female)
	DN40	57	73	55	DSP40	G1.5"(Male)
	DN40	69	75	55	DSP40	G2"(Female)
	DN40	63	73	55	DSP40	G2"(Male)
	DN65	68	108	84	DSP65	G2.5"(Female)
	DN65	68	108	84	DSP65	G2.5"(Male)
	DN100	78	153	123	AR100	G4"(Female)
	DN100	78	153	123	AR100	G4(Male)

DSP ADAPTOR WITH LOCK RING (Material: Aluminium)

	Size	H(mm)	W(mm)	D(mm)	Head	Thread
	DN40	96	76	55	DSP40	G1.5"(Female)
	DN40	76	76	55	DSP40	G1.5"(Male)
	DN40	95	78	55	DSP40	G2"(Female)
	DN40	76	76	55	DSP40	G2"(Male)
	DN65	105	108	84	DSP65	G2.5"(Female)
	DN65	104	109	84	DSP65	G2.5"(Male)
	DN100	130	149	123	AR100	G4"(Female)
	DN100	132	149	123	AR100	G4(Male)

GUILLEMIN ADAPTOR (Material: Aluminium)


Size	H(mm)	W(mm)	D(mm)	Thread
DN20	46	49	32	G3/4"
DN20	46	49	32	G1"
DN25	47	55	37.5	G1"
DN32	50	62	42.5	G1-1/4"
DN40	58	72	55	G1-1/2"
DN50	69	90	69	G2"
DN65	70	105	84	G2-1/2"
DN100	86	150	123	G4"
DN20	46	49	32	G3/4"
DN20	46	49	32	G1"
DN25	47	55	37.5	G1"
DN32	50	62	42.5	G1-1/4"
DN40	45	72	55	G1-1/2"
DN50	53	92	69	G2"
DN65	58	105	84	G2-1/2"
DN80	60	125	103	G3"