


## Landing Valve, Horizontal Type For Wet Risers

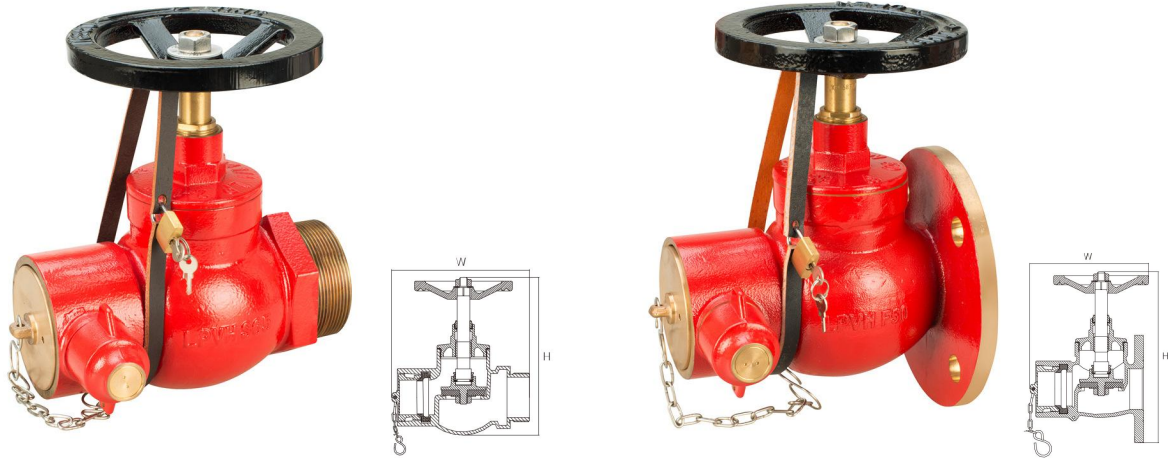

### MODEL & SIZE

Model	Size	H	W	Inlet	Outlet
<b>FT104</b>	DN65	250mm	185mm	DN65 FLANGE	BS336
<b>FT104S</b>	DN50	240mm	185mm	DN50 FLANGE	BS336
<b>FT104M</b>	DN65	204mm	185mm	2.5"BSPT MALE	BS336
<b>FT104F</b>	DN65	204mm	185mm	2.5"BSP FEMALE	BS336

### SPECIFICATION

- ❖ Landing valves test and certificate complying with BS 5041-1
- ❖ Certificate: LPCB
- ❖ Body material is copper alloy LG2, Thickness  $\geq 3\text{mm}$
- ❖ RAL3000 polyester epoxy Powder coating, Thickness  $\geq 100\mu\text{m}$
- ❖ Inlet Flange complying with BS 4504-2 16/21
- ❖ Inlet Screwed ends complying with BS21
- ❖ Outlet Female instantaneous pattern complying with BS336
- ❖ Bonnet material is copper alloy CZ122, Thickness  $\geq 3\text{mm}$
- ❖ Stem material is copper alloy CZ121, diameter  $\geq 19\text{mm}$
- ❖ 150mm Grey cast iron hand-wheel, powder coating
- ❖ Fully open a completely closed 5 turns
- ❖ Aluminium alloy blank cap complying with BS 336
- ❖ Body test 22.5 bar, Seat test 16.5 bar